

TM08

User Manual

Technical Data



Input Voltage	12-24VDC
Power Supply	External (not supplied)
Dimensions	86 x 86 x 36.5mm (W/H/D)
Mounting Method	Wall Mount
Output Channels	3 Channels
Color Grades	64 pre-programmed
Driving Capacity	4 amps per channel
Temperature	0-40 degrees Celsius

Operating Instructions



On/Off Button

Controller will revert to last mode when turned on



Mode Button

- ① Press to change between pre-programmed modes 1-11
- ② Press for > 2Sec to turn button sounds on/off



Brightness/Speed Increase Button

- ① Press to increase brightness when in static colour mode
 - ② Press to increase speed when in chase mode
- Hold down in either mode to speed up change



Brightness/Speed Decrease Button

- ① Press to decrease brightness when in static colour mode
 - ② Press to decrease speed when in chase mode
- Hold down in either mode to speed up change



Multicolor Jog Touch Button


Press to choose from 64 pre-programmed colours




11 x Pre-Programmed Modes

Mode	Function
1	Static Red - Brightness Adjustable
2	Static Green - Brightness Adjustable
3	Static Blue - Brightness Adjustable
4	Static Yellow - Brightness Adjustable
5	Static Purple - Brightness Adjustable
6	Static Cyan - Brightness Adjustable
7	Static White - Brightness Adjustable
8	3 Colour Fast Chase - Speed Adjustable
9	7 Colour Fast Chase - Speed Adjustable
10	3 Colour Slow Chase - Speed Adjustable
11	7 Colour Slow Chase - Speed Adjustable

Dimensions




Wiring Connections



- ① Output - Blue
- ② Output - Green
- ③ Output - Red
- ④ Output - Common +
- ⑤ Input - Voltage +
- ⑥ Input - Voltage -

Typical Wiring Schematic

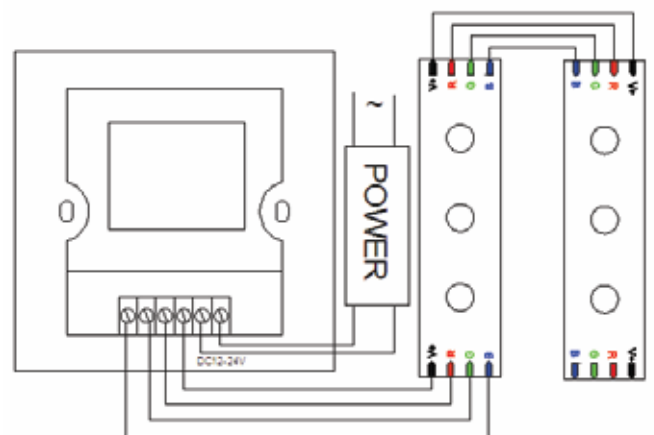

Installation

Gently prise gaps in panel with screwdriver as shown to access fixing holes



xulux

14/388 Newman Rd Geebung Q 4034
P 07 3172 7131 F 07 3161 5598
E sales@xulux.com.au
W www.xulux.com.au